



订购码/Ordering Code

VX2120 - 08 - AC220V

规格代码
Specification Code

接管口径
Joint Pipe Bore
06: 1/8"
08: 1/4"
10: 3/8"
15: 1/2"


标准电压
Standard Voltage
DC12V DC24V
AC24V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

规格/Specifcation


型号/Model	VX2120-06	VX2120-08	VX2120-10	VX2120-15
工作介质/Working Medium	空气、水、蒸汽/Air, Water, Steam			
动作方式/Motion Pattern	直动式/Direct Drive Type			
型式/Type	常闭型/Normal Close Type			
使用压力/Working-pressure	0~1.0MPa			
流量孔径/Aperture of Flow Rate(mm)	3		13	
接管口径/Port Size	G1/8"	G1/4"	G3/8"	G1/2"
使用温度范围/Operating Temperature Range	-5~+150℃		-5~+80℃	
油封材质/Material of Oil Seal	VITON		NBR	

*特殊电压及特殊规格请与厂方接洽 / Please contact Factory for special voltage and Specification.

外形尺寸/Overall Dimension

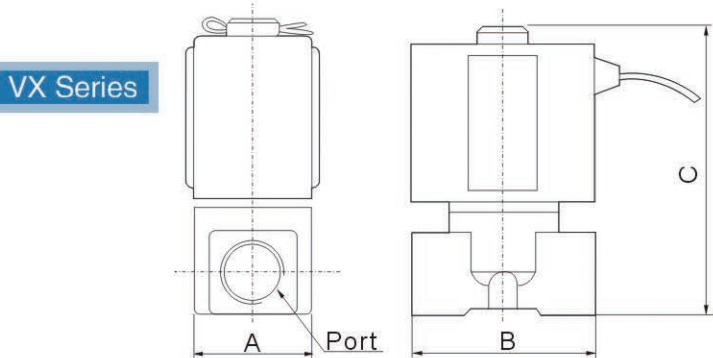

图形符号/Graphic Symbol



订购码/Ordering Code

DLKF - 23 - 06 - AC220V

工厂代码
Factory Code

位通数
22: 二位二通
23: 二位三通
Position and Way NO.
22: Two-position Two-way
23: Two-position Three-way

接管口径
Joint Pipe Bore
06: 1/8"
08: 1/4"

标准电压
Standard Voltage
DC12V DC24V
AC24V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

电磁阀线圈 / Valves Coils

US线圈/US Coil

线圈孔径、高度: $\phi 23 \times 55$
适用功率及电压:
AC 28VA 24~380V
DC 24W 24~380V
Coil aperture, Height: $\phi 23 \times 55$
Applicable power and Voltage:
AC 28VA 24~380V
DC 24W 24~380V

2W02线圈/2W025 Coil

线圈孔径、高度: $\phi 14 \times 31$
适用功率及电压:
AC 14VA 24~380V
DC 9W 6~380V
Coil aperture, Height: $\phi 14 \times 31$
Applicable power and Voltage:
AC 14VA 24~380V
DC 9W 6~380V

防爆线圈/Explosion-proof Coil

线圈孔径、高度: $\phi 13 \times 43$
适用功率及电压:
AC 12VA 24V~220V
DC 11W 12V~220V
Coil aperture, Height: $\phi 13 \times 43$
Applicable power and Voltage:
AC 12VA 24V~220V
DC 11W 12V~220V

防水线圈/Waterproof Coil

线圈孔径、高度: $\phi 16 \times \phi 43$
适用功率及电压:
AC 22VA 220~110V
DC 18W 24V
Coil aperture, Height: $\phi 16 \times 43$
Applicable power and Voltage:
AC 22VA 220~110V
DC 18W 24V

2P025线圈/2P025 Coil

线圈孔径、高度: $\phi 9 \times 29.5$
适用功率及电压:
AC 8VA 12V~220V
DC 6W 6V~110V
Coil aperture, Height: $\phi 9 \times 29.5$
Applicable power and Voltage:
AC 8VA 12V~220V
DC 6W 6V~110V

2W系列线圈/2W Series Coil

线圈孔径、高度: $\phi 16 \times 37$
适用功率及电压:
AC 18VA 24~380V
DC 12W 24~380V
Coil aperture, Height: $\phi 16 \times 37$
Applicable power and Voltage:
AC 18VA 24~380V
DC 12W 12~380V

QX系列线圈/QX Series Coil

线圈孔径、高度: $\phi 13.5 \times 26$
适用功率及电压:
AC 15VA 24V~380V
DC 12W 6V~220V
Coil aperture, Height: $\phi 13.5 \times 26$
Applicable power and Voltage:
AC 15VA 24V~380V
DC 12W 6V~220V

VX系列线圈/VX Series Coil

线圈孔径、高度: $\phi 11 \times 35$
适用功率及电压:
AC 13VA 12~380V
DC 8W 6~380V
Coil aperture, Height: $\phi 11 \times 35$
Applicable power and Voltage:
AC 13VA 12~380V
DC 8W 6~380V

4V210系列线圈/4V210 Series Coil

适用功率及电压:
AC 4.2~8.5VA
DC 3~8W
Coil aperture, Height: $\phi 16 \times 38$
Applicable power and Voltage:
AC 4.2~8.5VA
DC 3~8W

4V110系列线圈/4V110 Series Coil

适用功率及电压:
AC 5VA 110~220V
DC 2.8W 12~24V
Applicable power and Voltage:
AC 5VA 110~220V
DC 2.8W 12~24V