




订购码/Ordering Code

DL	23	06	AC220V
工厂代码 Factory Code	位通数 22二位二通 23二位三通 Position and Way NO.	接管口径 Joint Pipe Bore	标准电压 Standard Voltage
	22:二位二通 23:二位三通	06: 1/8"	DC12V DC24V
	22:Two-position Two-way 23:Two-position Three-way	08: 1/4"	AC24V 50Hz/60Hz
			AC110V 50Hz/60Hz
			AC220V 50Hz/60Hz
			AC380V 50Hz/60Hz

图形符号/Graphic Symbol




规格/Specifcation

型号/Model	DL22-06	DL22-08	DL23-06	DL23-08
工作介质/Working Medium	空气、水、蒸汽/Air, Water, Steam		空气 / Air	
流量孔径/Aperture of Flow Rate(mm)	1.6	2.4	3.2	4.0
CV值/CV Value	0.1	0.21	0.33	0.43
接管口径/Port Size	G1/8"		G1/4"	
使用压力范围/Working-pressure	0~1.5MPa	0~1.0MPa	0~0.7MPa	0~0.5MPa
使用电压范围/Voltage Range	±10%			
油封材质/Material of Oil Seal	NBR或VITON / NBR or VITON			

*特殊电压及特殊规格请与厂方接洽 / Please contact Factory for special voltage and Specification.

外形尺寸/Overall Dimension


DL Series

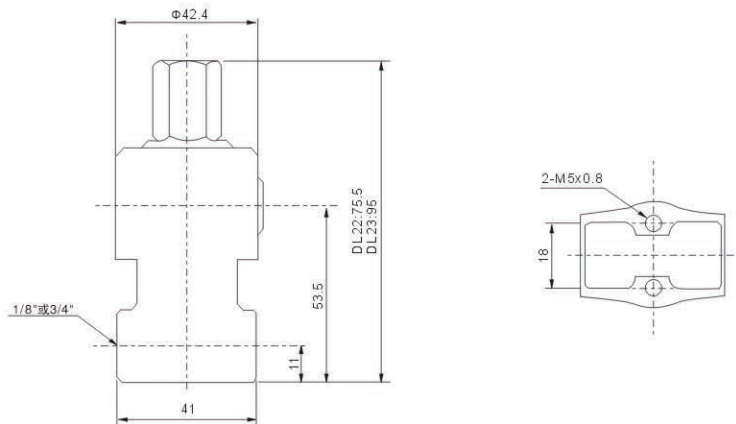

订购码/Ordering Code

2L	170	15	AC110V
规格代码 2L:蒸汽型二位二通电磁阀 Specification Code 2L: Steam type Two-position Two-way Solenoid Valve	流量孔径 Aperture of Flow Rate 170: 17mm 200: 22mm 300: 30mm 500: 50mm	接管口径 Joint Pipe Bore 10: 3/8" 35: 1-1/4" 15: 1/2" 40: 1-1/2" 20: 3/4" 50: 2" 25: 1"	标准电压 Standard Voltage DC12V DC24V AC24V 50Hz/60Hz AC36V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz

图形符号/
Graphic Symbol




规格/Specifcation

型号/Model	2L170-10	2L170-15	2L170-20	2L200-25	2L300-35	2L300-40	2L500-50
工作介质/Working Medium	空气、水、蒸汽/Air, Water, Steam						
动作方式/Motion Pattern	先导式/Guide Type						
型式/Type	常闭型/Normal Close Type						
流量孔径/Aperture of Flow Rate(mm)	17			22	30		50
CV值/CV Value	4.8			12	20		48
接管口径/Port Size	G3/8"	G1/2"	G3/4"	G1"	G1 1/4"	G1 1/2"	G2"
使用流体粘度度/Operation Fluid Viscosity	20 CST以下(Below)						
使用压力/Working-pressure	空气、水、蒸汽/Air, Water, Steam: 0.1~1.5MPa						
最大耐压力/Max. Pressure Resistance	1.5MPa						
工作温度/Operating Temperature Range	-5~+180℃						
使用电压范围/Voltage Range	±10%						
本体材质/Material of Body	黄铜/Brass						
油封材质/Material of Oil Seal	PTFE						

外形尺寸/Overall Dimension

2L Series

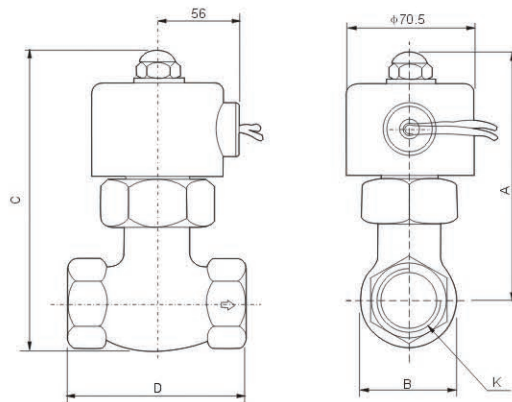

尺寸表/Dimension Sheet

型号/Model	A	B	C	D	K
2L170-10	125	38	146	76	G3/8"
2L170-15	125	42	146	81	G1/2"
2L170-20	125	47	146	84	G3/4"
2L200-25	136	54	162	91.5	G1"
2L300-35	148	76	185	111	G1 1/4"
2L300-40	148	76	185	111	G1 1/2"
2L500-50	178	88	223	164	G2"