



251-B

251

351

451

订购码/Ordering Code

1

5

1

B

AC220V

系列代码
1系列:G1/8
2系列:G1/4
3系列:G3/8
4系列:G1/2
Series Code
1 Series :G1/8
2 Series :G1/4
3 Series :G3/8
4 Series :G1/2

线圈及位数
3:二位三通
5:二位五通
Coil and Places
3:Two-position Three-way
5:Two-position Five-way

电控方式
1:双位置单电控
2:双位置双电控
3:三位置双电控
Electric control way
1: double position single
electronic control
2: double position double
electronic control
3: three position double
electronic control

B:Namur 型
B:Namur Type

标准电压
Standard Voltage
DC12V
DC24V
AC24V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

特性/Features


新颖的外形，可靠的寿命，采用进口密封圈，寿命达到二千万次以上(也可提供夹套式结构)。
Novel appearance, reliable life, adopt imported sealing ring, life of more than twenty million times (jacketed type structure) are available

规格/Specifcation


型号 Model	151	251	351	451
位通数/Position and Way NO.	二位五通/ Two-position Five-way	三位五通/ Three-position Five-way	二位五通/ Two-position Five-way	三位五通/ Three-position Five-way
接管口径/Port Size	G1/8	G1/4	G3/8	G1/2
工作压力/Working Pressure	0.15 ~ 0.8MPa			
最大耐压力/Max. Pressure Resisance	12MPa			
工作温度/Working Temperature	5 ~ 60°C			
电压范围/Voltage Range	± 15%~+10%			
耗电量/Power Consumption	AC: 5.5VA DC: 4.8W			
绝缘性及防护等级/Insulation & Protection Class	F级. IP65 / F Class. IP 65			
最高动作频率/Max. Frequency	每秒五次 / 5 Cycle / Secretary			
最短励磁时间/Shortest Activate Time	<0.05秒 / <0.05 Second			

外形尺寸/Overall Dimension


151

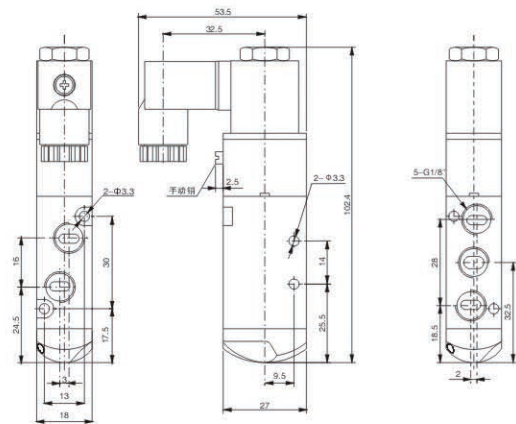


251

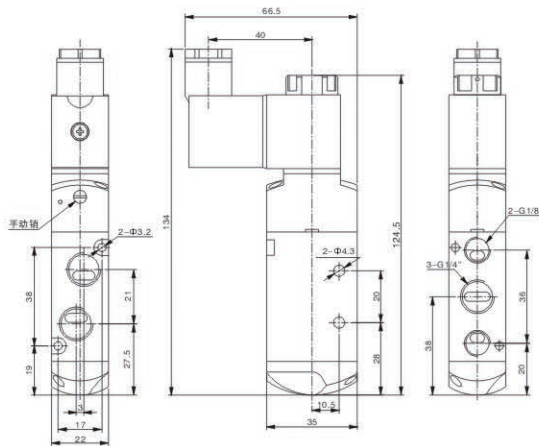


251-B

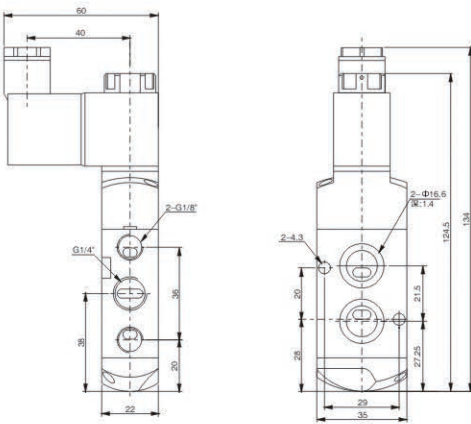

152

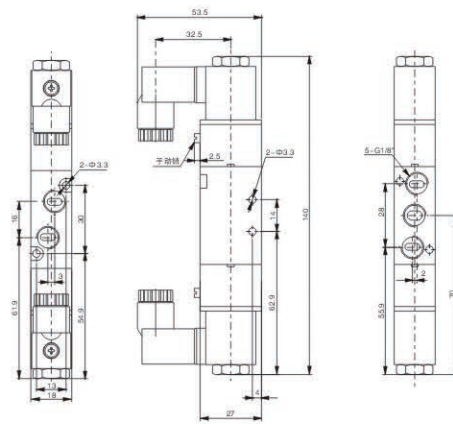

252

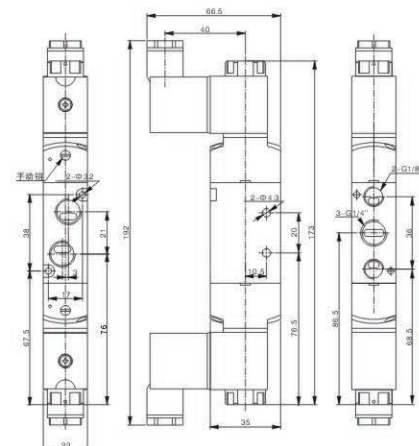

252-B

