




外形尺寸/Overall Dimension

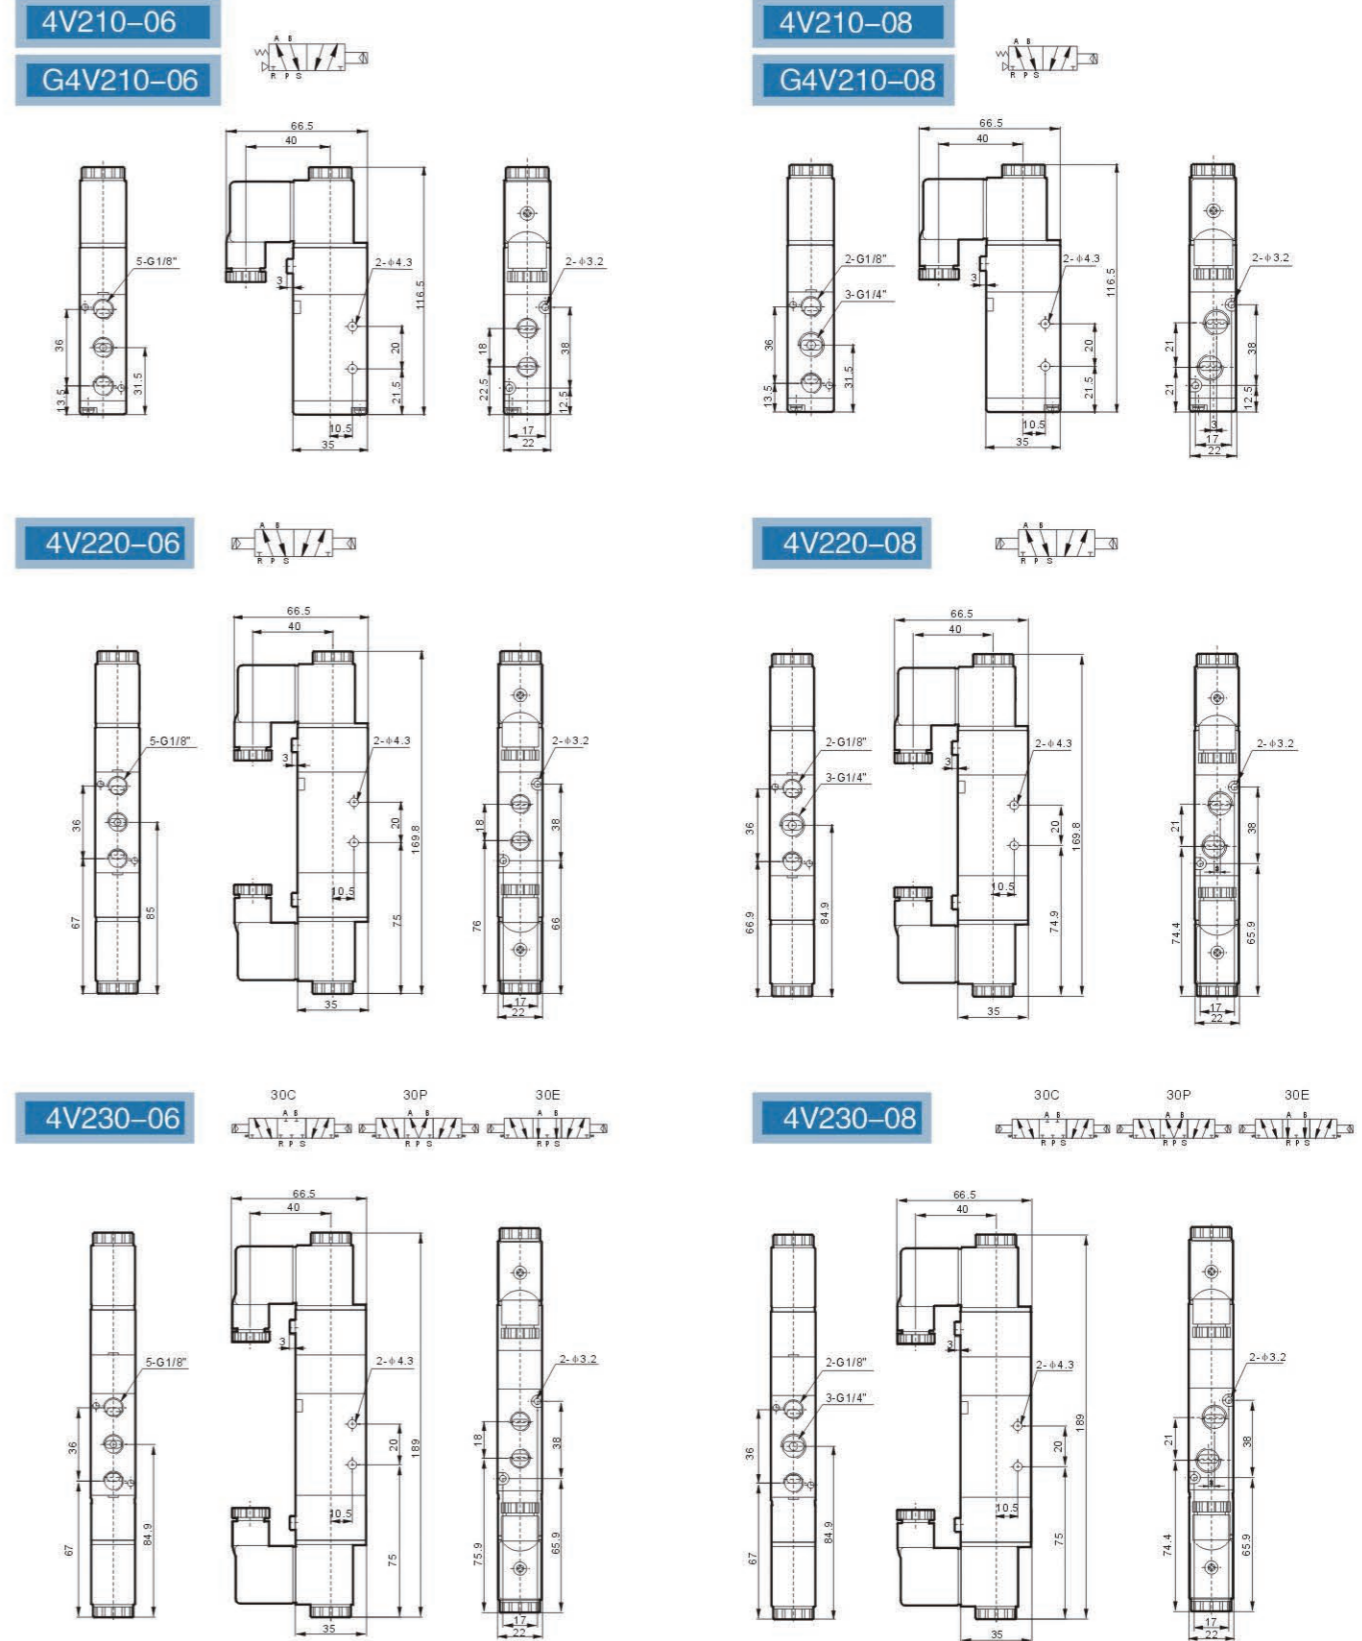

订购码/Ordering Code

<b>4V</b>	<b>2</b>	<b>10</b>	<b>08</b>	<b>B</b>	<b>AC220V</b>	<b>W</b>
<b>规格代码</b> 4V:二(三)位五通电磁阀 4A:二(三)位五通气控阀 3V:二位三通电磁阀 3A:二位三通气控阀 <b>Specification Code</b> 4V:Two (Three)-position Five-way Solenoid Valve 4A:Two (Three)-position Five-way Pneumatic Control Valve 3V:Two-position Three-way Solenoid Valve 3A:Two-position Three-way Pneumatic Control Valve	<b>系列代码</b> 200系列 Series Code 200 Series	<b>线圈及位数</b> 10:单头双位置 20:双头双位置 30C:双头三位置封闭型 30E:双头三位置排气型 30P:双头三位置压力型 <b>Coil and Places</b> 10:Single-head Double-position 20:Double-head Double-position 30C:Double-head Three-position Close Type 30E:Double-head Three-position Exhaust Type 30P:Double-head Three-position Pressure Type	<b>接管口径</b> Joint Pipe Bore 06:1/8" 08:1/4"	<b>接管形式及初始状态</b> 空白:管接式 B:二位五通板接式 三位五通板接式 NC:二位三通常闭型 NO:二位三通常开型 <b>Joint Pipe Form and Initial State</b> Blank:Pipe Connection Type B:Two-position Five-way Plate Connection Type Three-position Five-way Plate Connection Type NC:Two-position Three-way Normal Close Type NO:Two-position Three-way Normal Open Type	<b>标准电压</b> Standard Voltage DC12V DC24V AC24V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz	<b>接线形式</b> 空白:标准端子式 LD:茶色带灯端子式 LD1:白色带灯端子式 W:引线式 <b>Wiring Form</b> Blank:standard Connector LD:Brown with Lighting Connector LD1:White with Lighting Connector W: Lead Wire Type

规格/Specifcation

型号 Model	4V210-06	4V220-06	4V230C-06	4V230E-06	4V230P-06	4V210-08	4V220-08	4V230C-08	4V230E-08	4V230P-08
位通数/Position and Way NO.	二位五通/Two-position Five-way		三位五通/Three-position Five-way			二位五通/Two-position Five-way		三位五通/Three-position Five-way		
有效截面积/Effective Sectional Area	14mm <sup>2</sup> (CV=0.78)		12mm <sup>2</sup> (CV=0.67)			16mm <sup>2</sup> (CV=0.89)		12mm <sup>2</sup> (CV=0.67)		

型号 Model	3V210-06	3V220-06	3A210-06	3A220-06	3V210-08	3V220-08	3A210-08	3A220-08
位通数/Position and Way NO.	二位三通/Two-position Three-way							
有效截面积/Effective Sectional Area	14mm <sup>2</sup> (CV=0.78)				16mm <sup>2</sup> (CV=0.89)			
接管口径/Port Size	进气=排气=排气=G1/8" /Air Inlet=Air Outlet=Exhaust=G1/8" 进气=排气=G1/4" 排气=G1/8" /Air Inlet=Air Outlet=G1/4" Exhaust=G1/8"							
工作介质/Working Medium	空气(经40μm滤网过滤) /Air (40Micron Filtered)							
作用方式/Acting Type	内部先导式 / Inner Guide Type							
使用压力/Working Pressure	0.15~0.8MPa							
最大耐压力/Max. Pressure Resistance	1.2MPa							
工作温度/Working Temperature	5~50°C							
电压范围/Voltage Range	±10%							
耗电量/Power Consumption	AC: 5.5VA DC: 4.8W							
绝缘性及防护等级/Insulation & Protection Class	F级. IP65 / F Class. IP 65							
接线形式/Wiring Form	出线式或端子式 / Lead wire or Connector type							
最高动作频率/Max. Frequency	每秒五次 / 5 Cycle / Sec							
最短励磁时间/Shortest Activate Time	0.05秒 / 0.05 Second							