


4F210-08



4F210-08LG



FV320

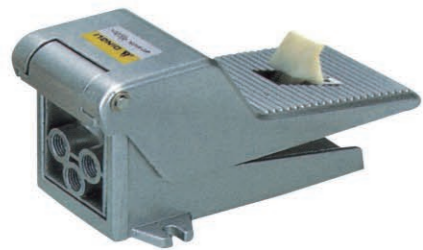

4F210-08L



4FM210-08L



FV420

订购码/Ordering Code

| | | | | | | | | |
|--|-------------------------------|---|---|--------------------------------------|---|---|---|--|
| 4F | 2 | 10 | - | 08 | L | FV | - | 320 |
| 规格代码 4F:二位五通脚踏阀 Specification Code 4F: Two-position Five-way Foot Valve | 系列号 Series NO. 2: 200系列 | 位置数 10: 单头双位置 Number of Places 10: Single-head Double-position | | 接口口径 Joint Pipe Bore 08: G1/4" | 形式代号 空白: 标准型 L: 附锁型 G: 附罩型 LG: 附锁及罩型 Type Code Blank: standard type L: with lock G: with cover LG: with lock and cover | 规格代码 脚踏阀 Specification Code Foot Valve | | 位通数 320二位三通 420三位四通 Position and Way NO. 320: Two-position Three-way 420: Two-position Four-way |

规格/Specifcation

| 型号 Model | 4F210-08 | 4F210-08L | 4F210-08G | 4F210-08LG | FV420 | FV320 |
|------------------------------------|--|-----------|-----------|------------|--|--------------------------------|
| 工作介质 Working Medium | 空气 (经40um滤网过滤) / Air (40Micron Filtered) | | | | | |
| 位通数 Position and Way Number | 二位五通 Two-position Five-way | | | | 二位四通 Two-position Four-way | 二位三通 Two-position Three-way |
| 接管口径 Joint Pipe Bore | 进气=排气=G1/4" Air Inlet=Air Outlet=G 1/4" | | | | 进气=排气=G1/4" 排气=G1/8" Air Inlet=Air Outlet=G1/4" Exhaust=G1/8" | |
| 作动方式 Acting Type | 直动式 / Direct Drive-Type | | | | | |
| 使用压力范围 Working Pressure Range | 0 - 0.8MPa | | | | | |
| 使用温度范围 Operating Temperature Range | 0 - 60°C | | | | | |

外形尺寸/Overall Dimension

