

DAW 1000~5000 系列过滤减压阀

DAW 1000~5000 Series Filter & Regulator



DAL 1000~5000 系列油雾器

DAL 1000~5000 Series Lubricator




订购码/Ordering Code

DA	W	3000	04	
系列 / Series DA系列 DA Series	功能代号 过滤器 & 调压阀 Function Code Filter & Regulator	规格代号 Specification Code 1000 3000 2000 4000 2500 5000	接管口径 Joint Pipe Bore M5:M5×0.8 01:G1/8" 02:G1/4" 03:G3/8" 04:G1/2" 06:G3/4" 10:G1"	排水方式 空白: 差压排水 D: 自动排水 Blank: Differential Drain D: Automatic Drain




图形符号/Graphic Symbol



规格/Specification

型号/Model	DAW1000 -M5	DAW2000 -01	DAW2000 -02	DAW3000 -02	DAW3000 -03	DAW4000 -03	DAW4000 -04	DAW4000 -06	DAW5000 -06	DAW5000 -10
额定流量/Rated Flow	100	550	550	2000	2000	4000	4000	4500	5000	5000
接管口径/Joint Pipe Bore	M5	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	G3/4"	G3/4"	G1"
过滤精度/Filter Precision	25 μ									
最高工作压力/Highest Working Pressure	1.0MPa									
保证耐压力/Ensured Pressure Resistance	1.5MPa									
使用温度范围/Operating Temperature Range	5~60℃									
调压范围/Range of Adjustable Pressure	0.05~0.7MPa									
容器材料/Container Material	聚碳酸酯/Polycarbonate									
防护罩/Protective Cover	无/Not Available									
排水器功能/Drain Function	差压放水/Differential Drain									
阀门类型/Valve Type	带溢流型/With Overflow									

外形尺寸/Overall Dimension

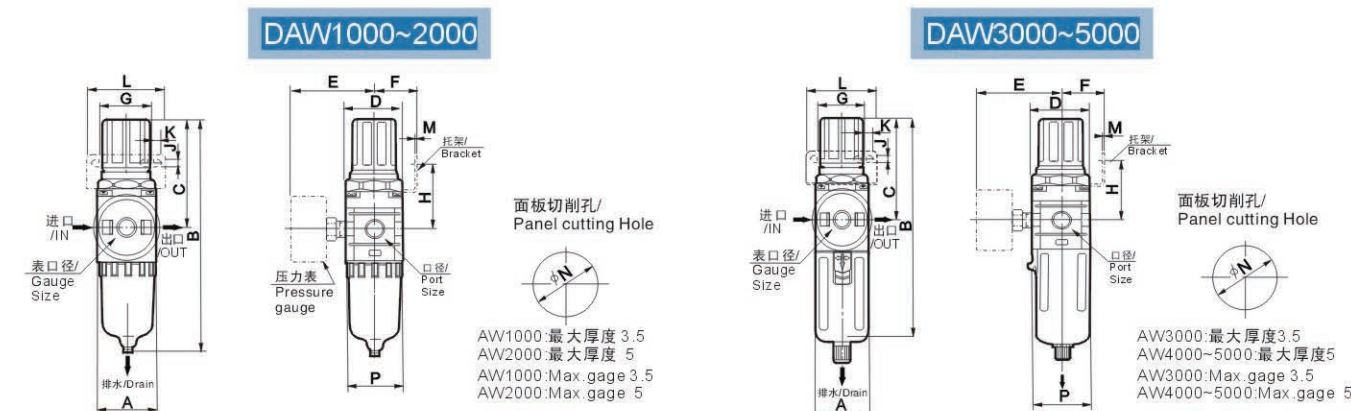


尺寸表/Dimension Sheet


型号/Model	口径/Port Size (G)	A	B	C	D	E	F	G	H	J	K	L	M	N	P
DAW1000	M5	25	109.5	50.5	25	26	25	28	30	4.5	6.5	40	2	20.5	28
DAW2000	G1/8" ~ G1/4"	40	164.5	78	40	56.8	30	34	43.5	5.4	15.4	55	2.3	33.5	40
DAW3000	G1/4" ~ G3/8"	53	211	92.5	53	60.8	39	40	46	6.5	8	53	2.3	42.5	56
DAW4000	G3/8" ~ 1/2"	70	262	112	70	70.5	49.2	54	53.5	8.5	10.5	70	2.3	52.2	73
DAW4000-06	G3~4"	75	267	114	70	70.5	49.2	54	55.5	8.5	10.5	70	2.3	52.5	73
DAW5000	G3/4" ~ G1"	90	338	116	90	75.5	49.2	54	62	8.5	10.5	70	2.3	52.5	90

订购码/Ordering Code

DA	L	3000	04	
系列 / Series DA系列 DA Series	功能代号 油雾器 Function Code Lubricator	规格代号 Specification Code 1000 3000 2000 4000 2500 5000	接管口径 Joint Pipe Bore M5:M5×0.8 01:G1/8" 02:G1/4" 03:G3/8" 04:G1/2" 06:G3/4" 10:G1"	

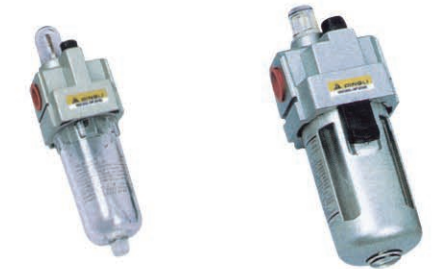


图形符号/Graphic Symbol



规格/Specification

型号/Model	XAL1000 -M5	XAL2000 -01	XAL2000 -02	XAL3000 -02	XAL3000 -03	XAL4000 -03	XAL4000 -04	XAL4000 -06	XAL5000 -06	XAL5000 -10
额定流量/Rated Flow	95	800	800	1700	1700	5000	5000	6300	7000	9000
接管口径/Joint Pipe Bore	M5	G1/8"	G1/4"	G1/4"	G3/8"	G3/8"	G1/2"	G3/4"	G3/4"	G1"
最高工作压力/Highest Working Pressure	1.0MPa									
保证耐压力/Ensured Pressure Resistance	1.5MPa									
使用温度范围/Operating Temperature Range	5~60℃									
建议用油/Recommended Oil Use	ISO VG 32									
容器材料/Container Material	聚碳酸酯/Polycarbonate									
防护罩/Protective Cover	无/Not Available									

外形尺寸/Overall Dimension

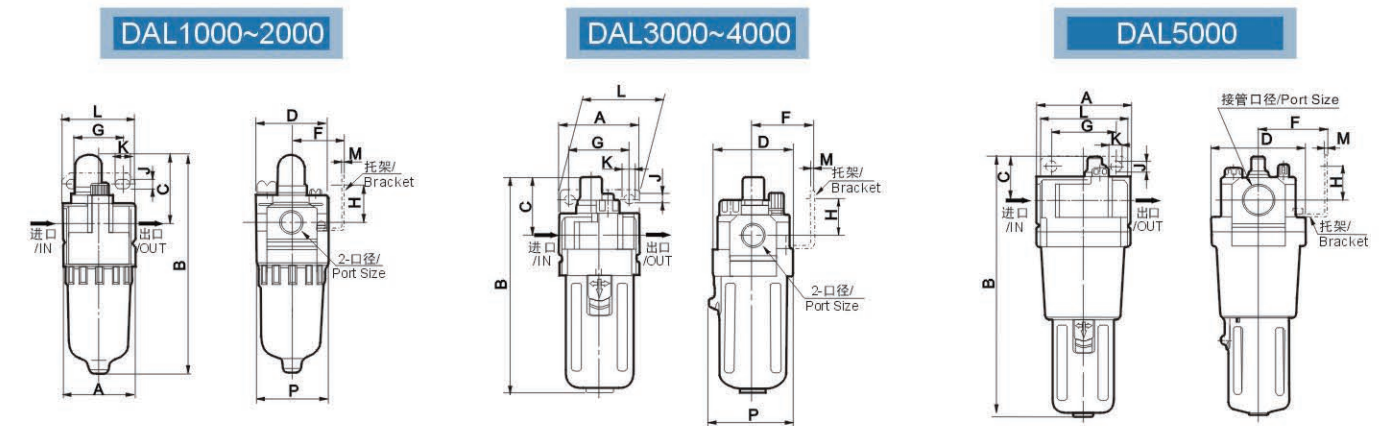

尺寸表/Dimension Sheet

型号/Model	口径/Port Size (G)	A	B	C	D	F	G	H	J	K	L	M	P
DAL1000	M5	25	81.5	25.5	25	-	-	-	-	-	-	-	27
DAL2000	G1/8" ~ G1/4"	40	122	38	40	30	27	22	5.4	8.4	40	2.3	40
DAL3000	G1/4" ~ G3/8"	53	142	38	53	41	40	23	6.5	8	53	2.3	56
DAL4000	G3/8" ~ 1/2"	70	177	41	70	50	54	26	8.5	10.5	70	2.3	73
DAL4000-06	G3~4"	75	177	39	70	50	54	25	8.5	10.5	70	2.3	73
DAL5000	G3/4" ~ G1"	90	254	45	90	66.5	66	35	11	13	90	3.2	90