

订购码/Ordering Code

BL	-	3000
型号		接管口径
AL: 小型		Joint Pipe Code
BL: 中型		1500:G1/8"
Model		2000:G1/4"
AL:Small Size		3000:G3/8"
BL:Middle Size		4000:G1/2"



图形符号/Graphic Symbol




规格/Specifcation


型号 / Model		AL1500	AL2000	BL2000	BL3000	BL4000
使用流体/Operating Fluid		空气 / Air				
接管口径/Port Size		G1/8"	G1/4"	G1/4"	G3/8"	G1/2"
保证耐压力/Ensured Pressure Resistance		1.5MPa				
使用温度范围/Operating Temperature Range		5~60℃				
建议润滑油/Suggested Lube		ISO VG 32 或同级用油 / ISO VG 32 or Same Grade Oil				
给油杯容量/Capacity of Oil Feed Cup		25 cc		90 cc		
重量/Weight		0.12 KG		0.4KG		
材质 Material	本体/Body	铝合金压铸成型 / Aluminum Die-casting Forming				
	容杯/Container Cup	PE				
	保护 杯罩/Protective Cup Cover	铁 / Steel				

外形尺寸/Overall Dimension

AL系列/Series

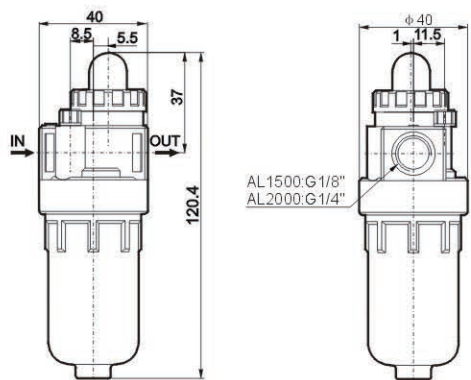

BL系列/Series

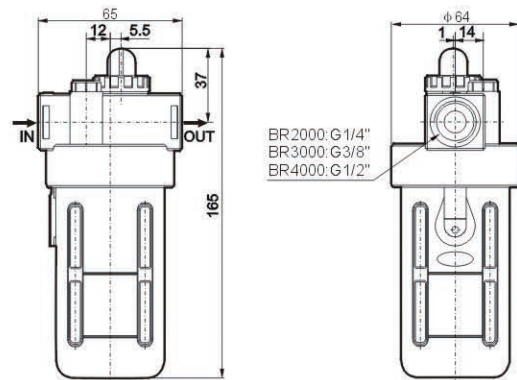


订购码/Ordering Code

BR	-	2000
型号		接管口径
AR: 小型		Joint Pipe Code
BR: 中型		1500:G1/8"
Model		2000:G1/4"
AR:Small Size		3000:G3/8"
BR:Middle Size		4000:G1/2"



图形符号/Graphic Symbol




规格/Specifcation

型号 / Model	AR1500	AR2000	BR2000	BR3000	BR4000
使用流体/Operating Fluid	空气 / Air				
接管口径/Port Size	G1/8"	G1/4"	G1/4"	G3/8"	G1/2"
调节压力范围/Range of Adjustable Pressure	0.05 ~ 0.85MPa				
最大可调压力/Max.Adjustable Pressure	0.95MPa				
保证耐压力/Ensured Pressure Resistance	1.5MPa				
使用温度范围/Operating Temperature Range	5~60℃				
重量/Weight	0.11 KG		0.35KG		
本体材质/Material	铝合金压铸成型 / Aluminum Die-casting Forming				

外形尺寸/Overall Dimension

AR系列/Series

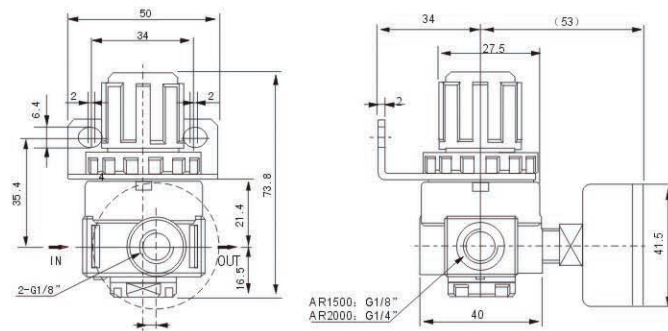

BR系列/Series

