



外形尺寸/Overall Dimension


SSA.SSAS 型/Type $\phi 12-\phi 16$

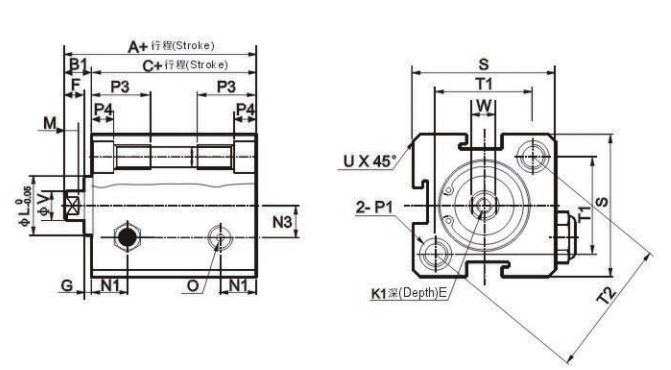


SSA.SSAS 型/Type $\phi 20-\phi 40$

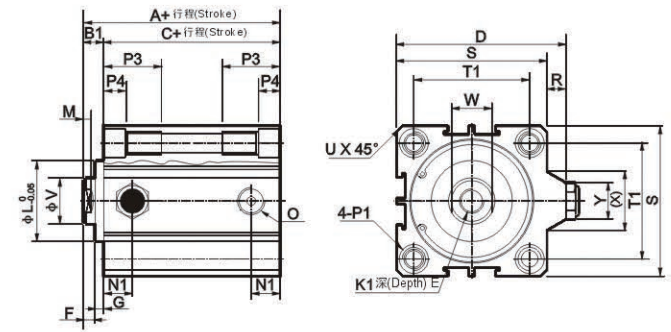

STA.STAS 型/Type $\phi 12-\phi 16$

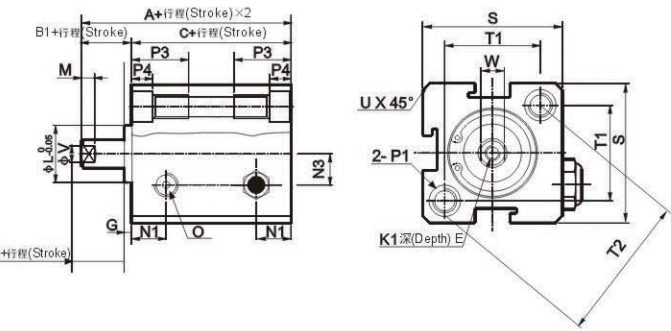

STA.STAS 型/Type $\phi 20-\phi 40$

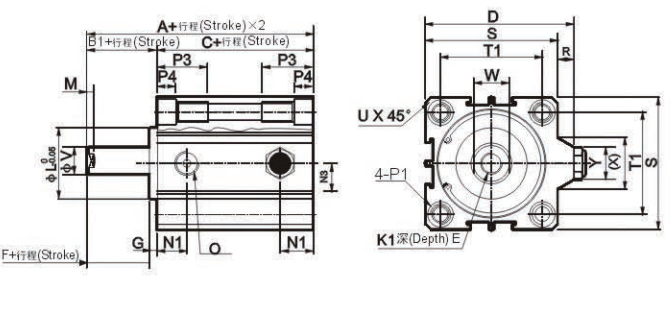


尺寸表/Dimension Sheet




型式/Type	标准型/Standard Type				附磁性/Attach magnet													
	A		B1	C		A		B1	C		D	E	F	G	K1	L	M	N1
	≤10	>10		≤10	>10	≤10	>10		≤10	>10								
行程 Stroke																		
12	32	42	5	27	37	42	52	5	37	47	-	6	4	1	M3×0.5	10.2	2.8	6.3
16	34	44	5.5	28.5	38.5	44	54	5.5	38.5	48.5	-	6	4	1.5	M3×0.5	11	2.8	7.3
20	35	45	5.5	29.5	39.5	45	55	5.5	39.5	49.5	36	8	4	1.5	M4×0.7	16	2.8	7.5
25	37	47	6	34	41	47	57	6	41	51	42	10	4	2	M5×0.8	17	2.8	8
32	41.5	51.5	7	34.5	44.5	51.5	61.5	7	44.5	54.5	50	12	4	3	M6×1	22	2.8	9
40	43	53	7	36	46	53	63	7	46	56	58.5	12	4	3	M8×1.25	28	2.8	10
内径/符号 Bore Size/Symbol	N3	O	P1				P3	P4	R	S	T1	T2	U	V	W	X	Y	
12	6	M5×0.8	双边(Double Sides): $\phi 6.5$ /牙(Thread): M5×0.8/通孔(Through ports): $\phi 4.2$				12	4.5	-	25	16.2	23	1.6	6	5	-	-	
16	6.5	M5×0.8	双边(Double Sides): $\phi 6.5$ /牙(Thread): M5×0.8/通孔(Through ports): $\phi 4.2$				12	4.5	-	29	19.8	28	1.6	6	5	-	-	
20	-	M5×0.8	双边(Double Sides): $\phi 6.5$ /牙(Thread): M5×0.8/通孔(Through ports): $\phi 4.2$				14	4.5	2	34	24	-	2.1	8	6	11.3	10	
25	-	M5×0.8	双边(Double Sides): $\phi 8.2$ /牙(Thread): M6×1.0/通孔(Through ports): $\phi 4.6$				15	5.5	2	40	28	-	3.1	10	8	12	10	
32	-	G1/8"	双边(Double Sides): $\phi 8.2$ /牙(Thread): M6×1.0/通孔(Through ports): $\phi 4.6$				16	5.5	6	44	34	-	2.15	12	10	18.3	15	
40	-	G1/8"	双边(Double Sides): $\phi 10$ /牙(Thread): M8×1.25/通孔(Through ports): $\phi 6.5$				20	7.5	6.5	52	40	-	2.25	16	14	21.3	16	

外形尺寸/Overall Dimension

SDAD.SDADS 型/Type
 $\phi 12-\phi 16$

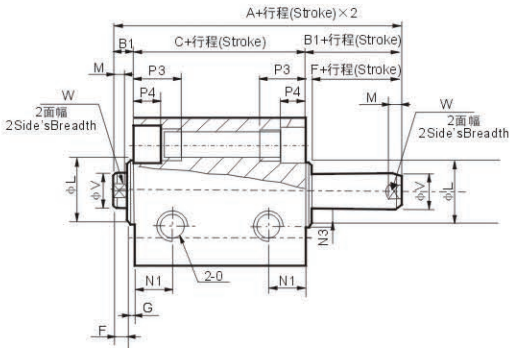

SDAD.SDADS 型/Type
 $\phi 20-\phi 100$

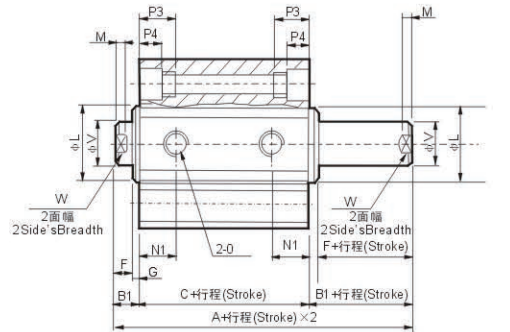

尺寸表/Dimension Sheet

型式/Type	标准型 Standard type			附磁性 Attach Magnet			D	E		F	G	K1	L	M	N1			
内径/符号 Bore Size/Symbol	A	B1	C	A	B1	C		行程 Stroke≤10	行程 Stroke>10									
12	27	5	17	37	5	27	-	6		4	1	M3×0.5	10.2	2.8	6.3			
16	29.5	5.5	18.5	39.5	5.5	28.5	-	6		4	1.5	M3×0.5	11	2.8	7.3			
20	30.5	5.5	19.5	40.5	5.5	29.5	36	8行程(Stroke)=5 时为(its)6.5		4	1.5	M4×0.7	15	2.8	7.5			
25	33	6	21	43	6	31	42	10行程(Stroke)=5 时为(its)7		4	2	M5×0.8	17	2.8	8			
32	38.5	7	24.5	48.5	7	34.5	50	8	12	4	3	M6×1	22	2.8	9			
40	40	7	28	50	7	36	58.5	9	12	4	3	M8×1.25	28	2.8	10			
50	46	9	28	56	9	38	71.5	11	15	5	4	M10×1.5	38	2.8	10.5			
63	50	9	32	60	9	42	84.5	11	15	5	4	M10×1.5	40	2.8	11.8			
80	63	11	41	73	11	51	104	14	20	6	5	M14×1.5	45	4	14.5			
100	75	12	51	85	12	61	124	18	20	7	5	M18×1.5	55	4	20.5			
内径/符号 Bore Size/Symbol	N3	O	P1					P3	P4	R	S	T1	T2	U	V	W	X	Y
12	6	M5×0.8	双边(Double Sides):Φ6.5/牙(Thread):M5×0.8/通孔(Through ports):Φ4.2					12	4.5	-	25	16.2	23	1.6	6	5	-	-
16	6.5	M5×0.8	双边(Double Sides):Φ6.5/牙(Thread):M5×0.8/通孔(Through ports):4.2					12	4.5	-	29	19.8	28	1.6	6	5	-	-
20	-	M5×0.8	双边(Double Sides):Φ6.5/牙(Thread):M5×0.8/通孔(Through ports):Φ4.2					14	4.5	2	34	24	-	2.1	8	6	11.3	10
25	-	M5×0.8	双边(Double Sides):Φ8.2/牙(Thread):M6×1.0/通孔(Through ports):Φ4.6					15	5.5	2	40	28	-	3.1	10	8	12	10
32	-	G1/8"	双边(Double Sides):Φ8.2/牙(Thread):M6×1.0/通孔(Through ports):Φ4.6					16	5.5	6	44	34	-	2.15	12	10	18.3	15
40	-	G1/8"	双边(Double Sides):Φ10/牙(Thread):M8×1.25/通孔(Through ports):Φ6.5					20	7.5	6.5	52	40	-	2.25	16	14	21.3	16
50	-	G1/4"	双边(Double Sides):Φ11/牙(Thread):M8×1.25/通孔(Through ports):Φ6.5					25	8.5	9.5	62	48	-	4.15	20	17	30	20
63	-	G1/4"	双边(Double Sides):Φ11/牙(Thread):M8×1.25/通孔(Through ports):Φ6.5					25	8.5	9.5	75	60	-	3.15	20	17	28.7	20
80	-	G3/8"	双边(Double Sides):Φ14/牙(Thread):M12×1.75/通孔(Through ports):Φ9.2					25	10.5	10	94	74	-	3.65	25	22	36	26
100	-	G3/8"	双边(Double Sides):Φ17.5/牙(Thread):M14×2/通孔(Through ports):Φ11.3					30	13	10	114	90	-	3.65	32	27	35	26